

UNIVERSAALVALGUSTI IP54



Tootekirjeldus



Korpus: metall

Difuuser: hea läbipaistvusega OPAAL PMMA

Kaitseaste: IP54

Lõõgikindlus: IK06

Eluiga: >50000h L80/B10

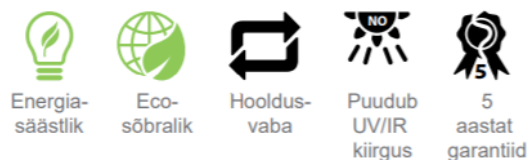

Tootekood	Võimsus	Valgusallikas	CCT (värvi temp.)	CRI (värviedastus indeks)	Valgusvoog	Mõõdud
AS.60-20-2500/9.4/IP5402	20W	LED	4000K	≥80	2500lm	612x172x54mm
AS.60-27-3300/9.4/IP5402	27W	LED	4000K	≥80	3300lm	612x172x54mm
AS.120-36-4900/9.4/IP5402	36W	LED	4000K	≥80	4900lm	1172x172x54mm
AS.120-52-6700/9.4/IP5402	52W	LED	4000K	≥80	6700lm	1172x172x54mm
AS.150-45-6300/9.4/IP5402	45W	LED	4000K	≥80	6300lm	1452x172x54mm
AS.150-56-7100/9.4/IP5402	56W	LED	4000K	≥80	7100lm	1452x172x54mm
AS.150-67-8600/9.4/IP5402	67W	LED	4000K	≥80	8600lm	1452x172x54mm

